


very simple
Building a CMS with PHP and MySQL


Content Management

Traditional, static website

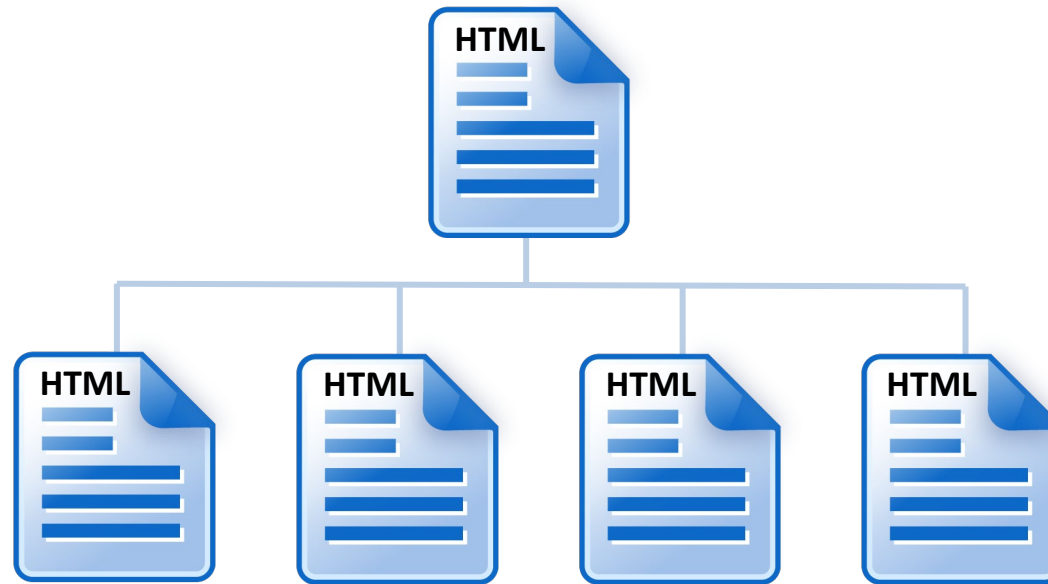


Every page of a website is rendered using a unique HTML file.
A five-page website = five HTML files.

Template-driven, dynamic website

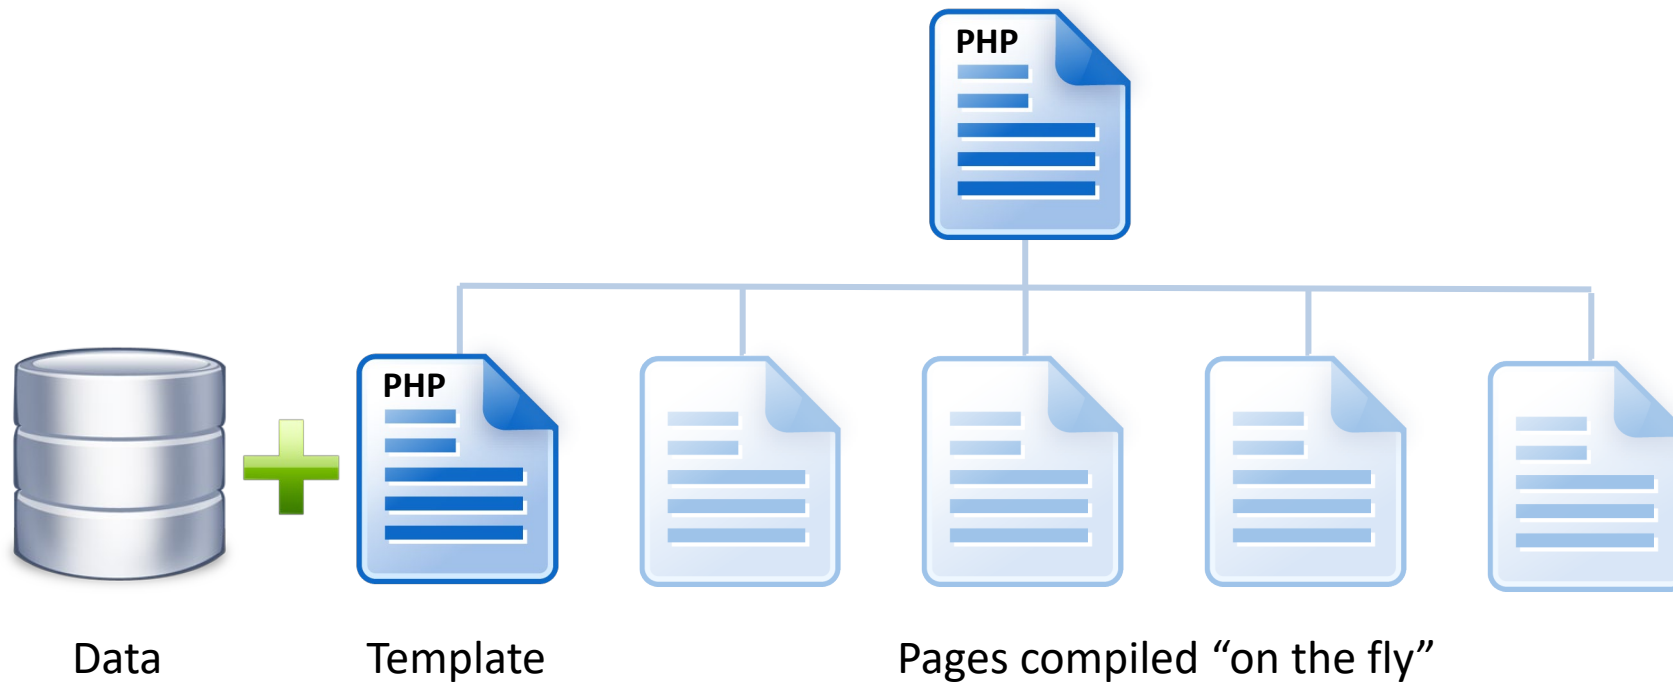

Template-driven sites use one or more template files to generate multiple pages by pulling data from a database. This five-page website uses just two PHP files.

How do links work?

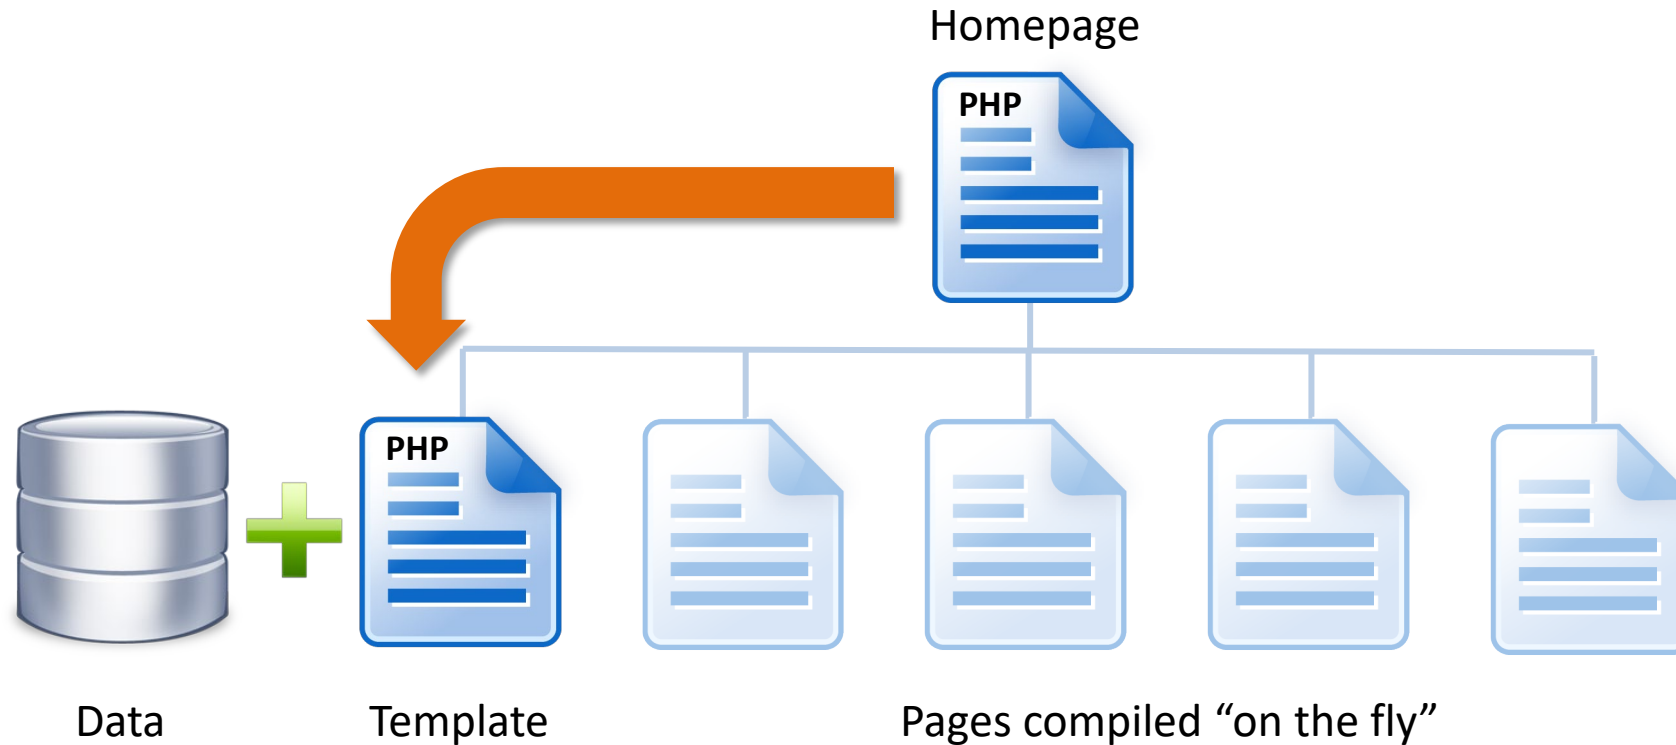

How can the homepage file tell the template file which bit of data it should use to compile the required page?

Passing data between scripts



Data can be passed from one PHP page to another using a *URL parameter*. This is a bit of data (a number or a text string) which is added to the address (URL) of the template file. In the example above, the value “8” is being sent and is identified by the name “id”, just like assigning a value to a variable. The question mark character “?” is used as a separator between the file path and the parameter.

What it looks like in the wild



```
<p><a href="article.php?id=8">Read more<span class="arrow">&raquo;</span></a></p>
```

The link on this page (index.php) has a URL parameter added “**id=8**”. The script on the linked page (article.php) will know to populate that page with article number 8, but...

How does a script access the data?



All data passed to a file using a URL parameter is stored in a special super global array called `$_GET`. Data in the array is available to PHP scripts. In the example above, that data can be assigned to a variable like this:

```
$article_id = $_GET['id'];
```

Multiple values

`article.php?id=2&title=good`



Homepage

Template

URL parameters can be used to send multiple values at once. The ampersand character “&” is used as a separator between name and value pairs. In the example above, **id** has a value of “2” (an integer) and **title** has the value “good” (a string). `$_GET` can contain multiple values because it is an array and not just a simple variable.

Validate that data!



Any data passed to a script via a URL parameter should be considered **potentially dangerous** because it can easily be tampered with. In the above example, the “8” could easily be changed to something else, including a fragment of PHP! It must therefore be *validated* before it can be used safely.

Check the data type



An easy way to validate a URL parameter is to check the data type. In this example, the data should be an integer and we can check for that using the `filter_var` function:

```
filter_var($_GET['id'], FILTER_VALIDATE_INT)
```

PHP can filter lots of different data types. Here, we're checking that `$_GET['id']` is an integer.

Testing for an integer

```
if (isset($_GET['id']) && filter_var($_GET['id'], FILTER_VALIDATE_INT)) {  
    $article=$_GET['id'];  
}else{  
    header('HTTP/1.0 404 Not Found');  
    exit("<h1>Not Found</h1>\n<p>The submitted data is not valid.</p>");  
}
```

The above `if/else` statement checks the incoming data and reacts depending on whether the data looks OK or not. It uses the `isset` function to check whether `$_GET['id']` contains a value and the `filter_var` function is used to check that the value is an integer (“&&” means that both conditions must be true). If the test is passed, the data is assigned to the variable `$article`. If the test is not passed, a 404 error is generated, the script is terminated, and a message is printed. The `filter_var` function was introduced in PHP 5.2.

Building the query

```
$query = "SELECT article_id, headline, article, author, published  
FROM articles WHERE article_id = $article";
```

Once we're **certain** that the data passed to the script via the URL parameter is an integer, we can use it to select the requested article from the database. The query above includes a **WHERE** clause that will return only the article matching the value contained in `$article`.

Testing for other data types




Testing for an integer is very easy but testing for other data types is more difficult. Say we wanted to pass a text string. We can check that it is a string but that still doesn't tell us whether the string is good or bad, so we must be extra careful with string data and all strings should be *sanitized* to remove or escape suspicious characters such as quotes.

Sanitising string data

```
if (isset($_GET['id']) && filter_var($_GET['id'], FILTER_SANITIZE_STRING)) {  
    $article=$_GET['id'];  
}else{  
    header('HTTP/1.0 404 Not Found');  
    exit("<h1>Not Found</h1>\n<p>The submitted data is not valid.</p>");  
}
```

One of the first things a hacker will do to test for vulnerability is modify the URL parameter to include a quote character. This could be used to prematurely terminate the query string and insert some malicious code into your script. The `FILTER_SANITIZE_STRING` option will encode all quotes so that the script interprets them as part of the string and not as a string termination character. There are many methods for sanitizing strings depending on the expected output, but you must at least deal with quotes to combat *SQL injection*.

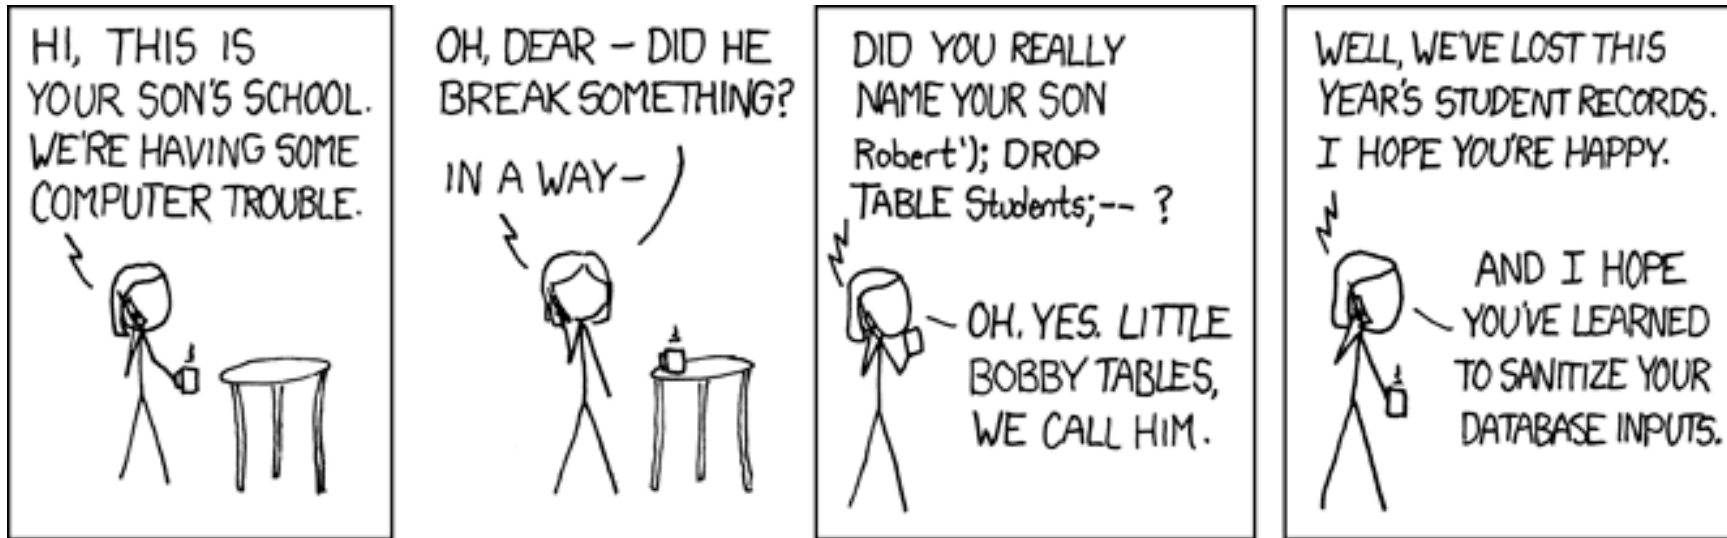

Just using:

```
filter_var($var, FILTER_SANITIZE_STRING)
```

would have avoided this problem because the string:


```
Robert'); DROP TABLE students;--
```

would have been sanitized as the harmless:

```
Robert\'); DROP TABLE students;--
```

Cartoon by [xkcd](https://xkcd.com/)

Database design

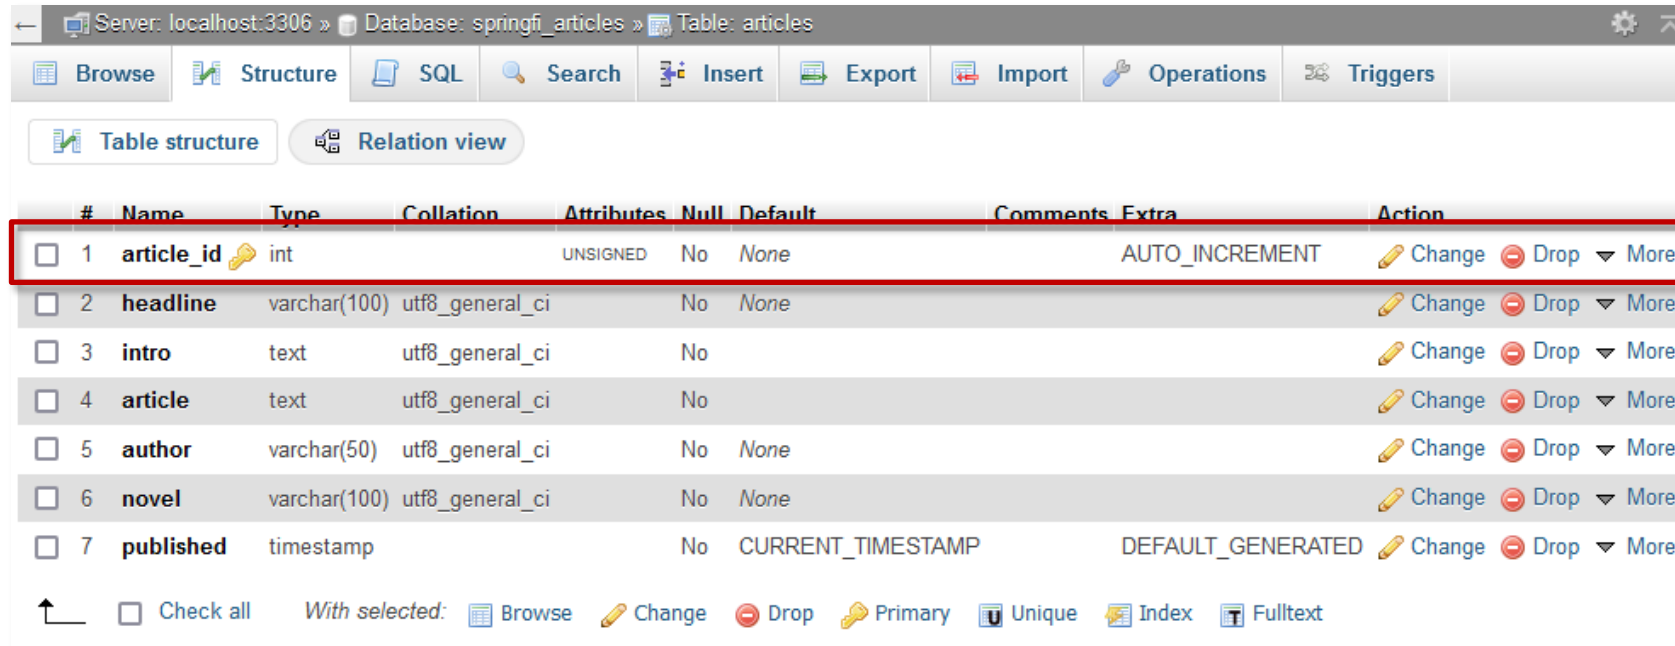

The screenshot shows a database management interface with the following components:

- Top bar: Server: localhost:3306 » Database: springfi_articles » Table: articles
- Navigation tabs: Browse, Structure, SQL, Search, Insert, Export, Import, Operations, Triggers
- Sub-tabs: Table structure (selected), Relation view
- Table structure table:

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
<input type="checkbox"/>	1	article_id	int	UNSIGNED	No	None		AUTO_INCREMENT	Change Drop More
<input type="checkbox"/>	2	headline	varchar(100)	utf8_general_ci	No	None			Change Drop More
<input type="checkbox"/>	3	intro	text	utf8_general_ci	No				Change Drop More
<input type="checkbox"/>	4	article	text	utf8_general_ci	No				Change Drop More
<input type="checkbox"/>	5	author	varchar(50)	utf8_general_ci	No	None			Change Drop More
<input type="checkbox"/>	6	novel	varchar(100)	utf8_general_ci	No	None			Change Drop More
<input type="checkbox"/>	7	published	timestamp		No	CURRENT_TIMESTAMP		DEFAULT_GENERATED	Change Drop More

At the bottom, there is a toolbar with the following options:

- ☐ Check all
- With selected: [Browse](#) [Change](#) [Drop](#) [Primary](#) [Unique](#) [Index](#) [Fulltext](#)

The easiest way to keep your scripts and websites secure is to rely on integer values for identifying content (articles, news items etc.) because they are easy to test for. This is why it's always a good idea to include a unique index value in your database tables. The database table above is designed to store articles, but the first column is just an index value called **article_id**. This means that each article can be identified by a unique integer. Note that this field is also a primary key and auto-increments.

Server: localhost:3306 » Database: springfi_articles » Table: articles

Showing rows 0 - 7 (8 total, Query took 0.0011 seconds.)

```
SELECT * FROM `articles`
```

☐ Profiling [Edit inline] [Edit] [Explain SQL] [Create PHP code] [Refresh]

☐ Show all | Number of rows: 25 | Filter rows: Search this table | Sort by key: None

+ Options

	article_id	headline	intro	article	author	novel	published
<input type="checkbox"/> Edit Copy Delete	1	The roaring wave of fear	<p>Before dawn the black vapour was pouring throug...	<p>Before dawn the black vapour was pouring throug...	H. G. Wells	The War of the Worlds	2022-02-15 12:18:07
<input type="checkbox"/> Edit Copy Delete	2	The scene in Central London	<p>G...	<p>G...	H. G. Wells	The War of the Worlds	2022-02-16 12:21:07
<input type="checkbox"/> Edit Copy Delete	3	I am in the habit of going to sea	<p>Once more. Say you are in the country; in some ...	<p>Once more. Say you are in the country; in some ...	Herman Melville	Moby Dick	2022-02-17 12:29:25
<input type="checkbox"/> Edit Copy Delete	4	On his back was a quiverful of arrows	<p>The way led along upon what had once been the e...	<p>The way led along upon what had once been the e...	Jack London	The Scarlet Plague	2022-02-18 12:35:25
<input type="checkbox"/> Edit Copy Delete	5	A village at the edge of the jungle	<p>Large trees had been chopped down fifteen or tw...	<p>Large trees had been chopped down fifteen or tw...	Edgar Rice Burroughs	At the Earth's Core	2022-02-19 12:36:34
<input type="checkbox"/> Edit Copy Delete	6	In chains beneath the Earth	<p>I...	<p>I...	Edgar Rice Burroughs	At the Earth's Core	2022-02-20 12:45:34
<input type="checkbox"/> Edit Copy Delete	7	The strange horror of its appearance	<p>Those who have never seen a living Martian can ...	<p>Tho...	H. G. Wells	The War of the Worlds	2022-02-21 12:40:44
<input type="checkbox"/> Edit Copy Delete	8	Johnathan Harker's Journal	<p>We left in pretty good time, and came after nig...	<p>We left in pretty good time, and came after nig...	Bram Stoker	Dracula	2022-02-22 18:39:38

☐ Check all | With selected: Edit Copy Delete Export

If we structure our database tables so that they always have a unique index, which is an integer, we can then refer to each row of data by its integer value. In this example, each article can be uniquely identified by its `article_id`.

The full sequence

1. User clicks link that includes a URL parameter (an integer).
2. A PHP script in the target file tests to see if the data received via `$_GET['id']` is valid (is it really an integer?).
3. If the test is passed, the value is assigned to a variable.
4. An SQL query is built using the value as an identifier.
5. The query is sent to the database.
6. The relevant content is returned and can be formatted and printed by PHP in the usual way.

Warning



Never use the GET method to send sensitive data between scripts because any data sent will be clearly visible in the URL.

Always validate and sanitise any data received via the GET method; it may have been tampered with and should be considered potentially harmful.

slideshow.php?status=end